

User Guide

INF4210-Pinout





INF4210: Rebel Dash Cable



Description:

9 Way D sub connector (male nut) to Rebel Dash Deutsch cable. AUX/CAN1 (Supplied with RebelDash)


Tech Specs:

Cable Length	1500mm
Cable Thickness	24 AWG 0.5 mm
Connector A	Connects to Rebel Dash, Deutsch connector 12-way
Connector B	9-pin D-sub [DB9] plug, compatible with CiA 303-1
Temperature	Operating temperature: -20degC to +80degC
Weight	122 g
Colour	Black



Rebel Dash Connector

Female 12-pin standard Deutsch connector

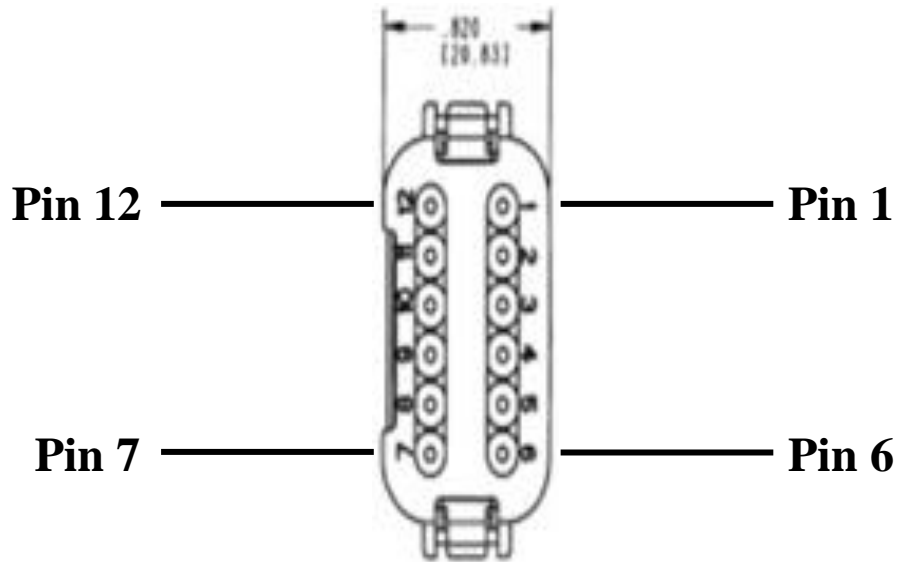


Pin No	Pin Function
Pin 1	Power Ground
Pin 2	Power Supply 10 to 32 V
Pin 4	Ground
Pin 7	CAN Bus Low Signal
Pin 8	CAN Bus High Signal



CAN/AUX Power Connector

Male 9-pin standard D-type connector with nuts

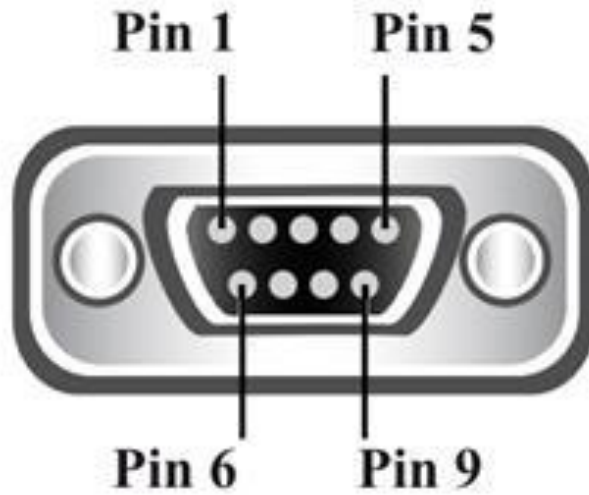

DB9	Pin Function
Pin 2	CAN Bus Low Signal
Pin 3	Ground (alternatively pin 5 may be used)
Pin 5	Ground (alternatively pin 3 may be used)
Pin 7	CAN Bus High Signal
Pin 9	Power Supply 10-32V

Influx Technology Headquarters, UK

Office Suite 22,
Building 03 Millbrook Proving Ground,
Station Lane Millbrook
Bedford
MK45 2JQ

Telephone: +44 (0) 1525 842504
Sales: sales@influxtechnology.com

Influx Big Data Solutions Pvt Ltd, India

#2,
Krishvi,
Ground Floor,
Old Airport Road,
Domlur,
Bangalore,
560071

Phone: +91 7337748490
Sales: sales_india@influxtechnology.com

Influx Technology Asia, China

Rm.722,
Flr.7,
Lisheng Tower,
Wangfujing Street 201,
Dongcheng District,
Beijing,
100005,
China

Telephone: 86-10-5718-1640
Email: info@influxasia.com